



CONTROL HMI5.0




EXALUX™ CONTROL HMI5" is a wall/ panel mount touch controller designed to control the lights in small TV or radio studios with simplicity.

EXALUX™ CONTROL HMI 5" offers a multi-apps interface in a compact and versatile solution. HMI5" control panel is designed to be mounted directly onto a panel or wall, or any flat drillable surface.

Thanks to the new EXALUX X-LINK connection, only one cable is needed to power **CONTROL HMI 5"** and communicate with the HUB interface.

With its wide supply range (+7 to 30VDC), **CONTROL HMI 5"** can be powered with the CONTROL HUB through the RJ45 connector over a long length of cable.

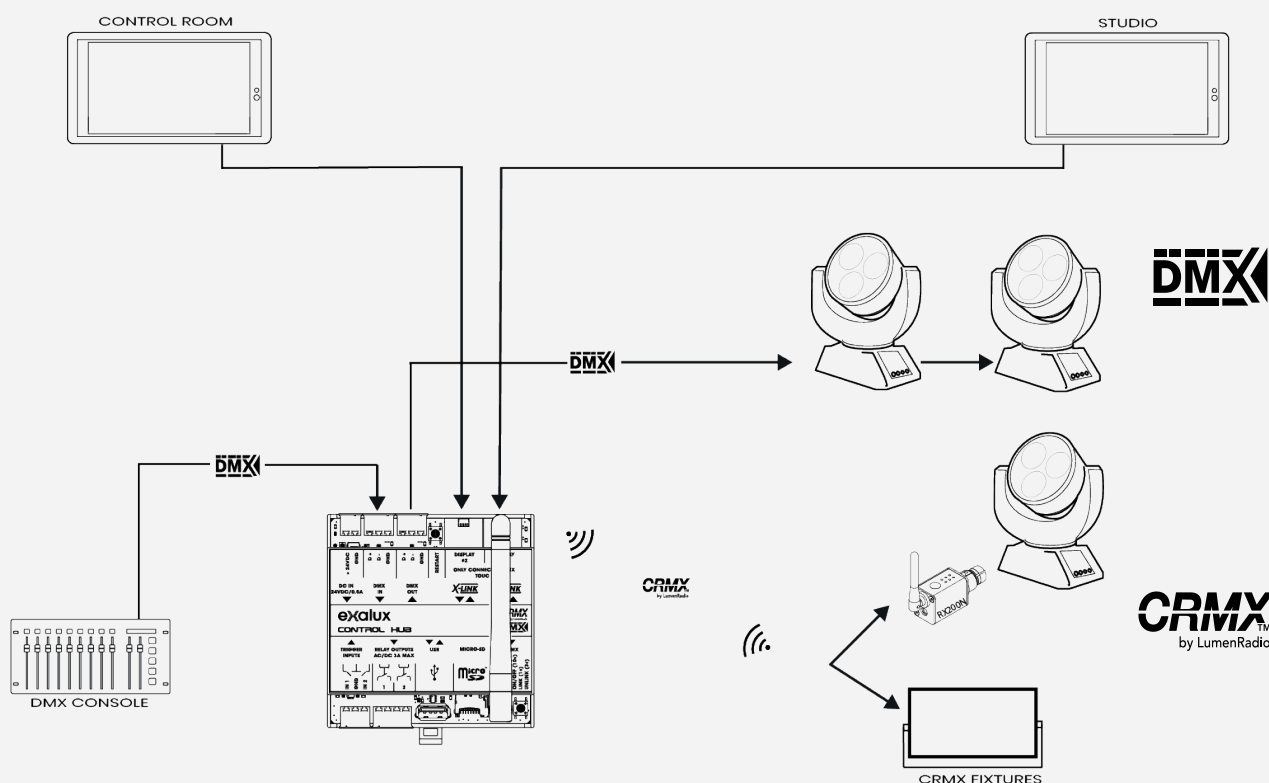

PARTS & ACCESSORIES

HMI5" CONTROL PANEL	CTL.000.005
DESKTOP HOLDER	ACC.009.002

Control with Exalux's DNA

CRMX by LumenRadio™ inside
DMX512 compliant
1 universe / 512 channels



User-centric

Wide supply range
Intuitive Human-Machine Interface
Easy to set up

APPS & FEATURES


LIGHTING CONTROL	Universal fixture controller
DMX BYPASS	Application enabling the re-routing of DMX input to DMX output and CRMX
RECORDER	Real time DMX recorder 8 memories up to 4 hours recording @44Hz max
MEMORIES	2 x 8 banks memory player
	SCENES : 8 memories
	SEQUENCES : 8 memories 1 time / loop mode
ZONES	Adjustment of light intensity per zone
PROGRAM	Program lighting adjustments based on the time of the day
UPDATE	Firmware and DMX fixtures update trough the USB flash drive

TECHNICAL SPECIFICATIONS

Power / Data Connection	RJ45
Display Type	TFT 5.0", 480x854, Capacitive Touch
Power Consumption	2,1W (@24VDC)
Housing / Mounting	ABS PC / Wall or Panel mountable
IP Rating	IP4X
Certifications	CE, RoHS
Weight	130g

OPERATING CONDITIONS

		Min	Typ	Max	
Input Voltage	V _{in}	7,0	12,0	30,0	Vdc
Storage T°	T _{st}	-30		+80	°C
Operating T°	Top	-20	25	+70	°C

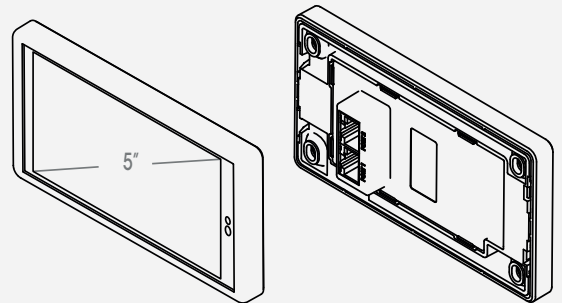

DIMENSIONS

