

exalux EXATILE CCT



EXATILE CCT is a cinema grade LED tile softly adjusted from 3100K to 5700K, ideal for professional lighting in studios.

its low Duv (-0.0008@5600K) allows accurate lighting without the need for G/M correction.



EXATILE CCT produces a soft and uniform light over the entire lighting surface.

EXATILE PIXEL IN SHORT:

- > Tunable White LED Engine
- > CCT from 3 100K to 5 700K
- > DMX / RDM
- > CRMX, CRMX², W-DMX, Bluetooth
- > V-Mount
- > Built-in PSU
- > L-Track mounting



EXATILE CCT BENEFITS

- > Low Duv,
- > Uniform light,
- > Soft light,
- > Smooth dimming,
- > Cine-grade fixture.

PARTS & ACCESSORIES

- > EXATILE CCT : EXT.001.000
- > SNAP GRID : -

FEATURES

Control Modes	CCT
Control	DMX, RDM, Wireless (CRMX) Local
Memory Presets	3
Interface	1.54" TFT display, knob, switches
Others	Firmware upgrade from USB port

LIGHT

CCT range	3100K > 5700K
Beam	120°
Illuminance (1m)	1 100 lux
CRI	Min : 96 Max : 97
TLCI	Min : 98 Max : 99
TM-30 Rf	Min : 96 Max : 96
TM-30 Rg	Min : 104 Max : 104

DMX INTERFACE


Standard	DMX512-A / RDM
DMX Frame Rate	0,8-830Hz
DMX Input	Neutrik XLR 5 pins Male PoD compliant
DMX Output	Neutrik XLR 5 pins Female PoD compliant

WIRELESS INTERFACE

Standard	LumenRadio™ CRMX / CRMX ²
Frequency	W-DMX G3/G4s
Antenna	Internal antenna, I-PEX MHF® I (U.FL compatible)
RF Output / Sensitivity	20dBm
Range	Up to 200m

TECHNICAL SPECIFICATIONS

Power Connection	PowerCon (In & Out)
Power Supply Voltage	100-240VAC / 50-60Hz
V-Mount Input Voltage	14.4-14.8VDC~26VDC
Power Consumption	57 W max
Housing / Mounting	ABS, black
Diffuser	PMMA
IP Rating	IP30
Certifications	CE, RoHS
Storage T°	-20°C > 60°C
Operating T°	-10°C > +40°C
Weight	5 750 g

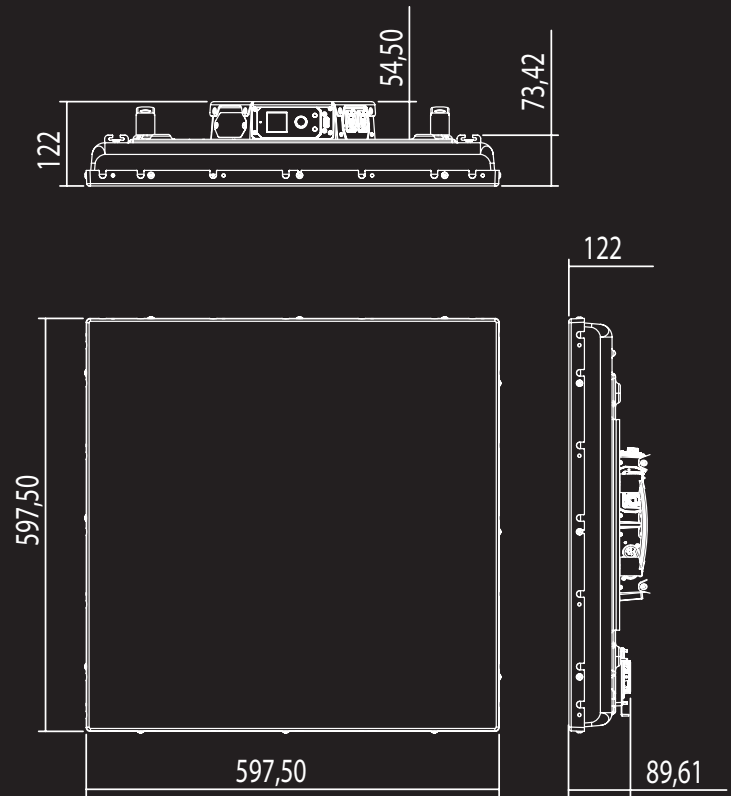

MOUNTING & OPTIONS

handling	Handles (2)
Mounting	5/8" UNC Adapter,
Options	Quick Release Plate (optional), L-Track (optional), Slings (optional) O-Ring (optional)