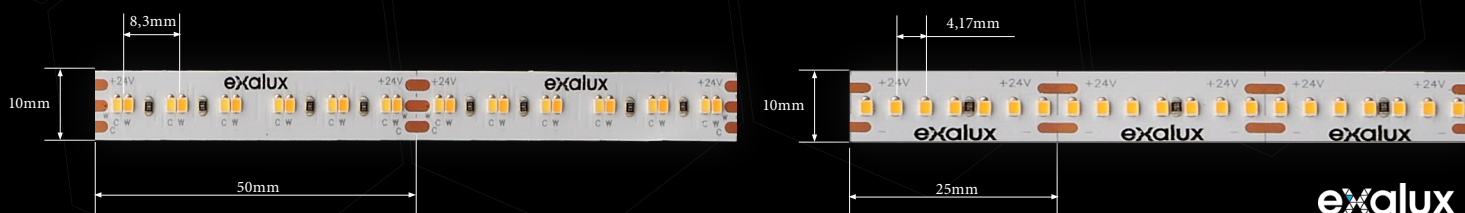


**exalux****TAPE10-SMD2216-XXXX-W19-24****SCENIC
SERIES****94
CRI****19
W/M****24
VDC****TECHNICAL SPECIFICATIONS**

Number Led/M	240
Power W/m	19,2W
PCB Width	10mm
CRI (Ra) min	94
Max length(10% voltage drop)	5m
Cut Size	25mm (2700K, 3000K, 4000K, 6500K) 50mm (TW2765)
Adhésive Tape	3M 9472

P/N	CCT	CRI (Ra)	Power (W/M)	Efficacy LM/W	LM/M	Working voltage	IP Rated
TAPE10-SMD2116-TW2765-W19-24 SKU : FLX.000.004	2700K ± 5% 6500K ± 5%	94	19.2 ± 5%	75-85 ± 5% 85-95 ± 5%	700 ± 5% 820 ± 5%	24VDC	IP20
TAPE10-SMD2116-K27-W19-24 SKU : on request	2700K ± 5%	94	19.2 ± 5%	75-85 ± 5%	1 364 ± 5%	24VDC	IP20
TAPE08-SMD2116-K30-W19-24 SKU : on request	3000K ± 5%	94	19.2 ± 5%	75-85 ± 5%	1 509 ± 5%	24VDC	IP20
TAPE08-SMD2116-K40-W19-24 SKU : FLX.000.028	4000K ± 5%	94	19.2 ± 5%	85-95 ± 5%	1 590 ± 5%	24VDC	IP20
TAPE08-SMD2116-K65-W19-24 SKU : on request	6500K ± 5%	94	19.2 ± 5%	85-95 ± 5%	1 629 ± 5%	24VDC	IP20

DIMENSIONS**exalux**
exalux.eu